

## SILVER and GOLD refrigerated counters

EN



silver



gold



### GENERAL FEATURES

External panels and doors in AISI 304 18/10 stainless steel (with Scotch-Brite satin finish)  
 External base, back and top in AISI 430  
 Inner lining joint, in AISI 304 18/10 stainless steel  
 Insulation in high density (42 kg/m<sup>3</sup> approx.) expanded polyurethane, 50 mm thick, HCFC-free  
 Copper evaporator coil with aluminium fins protected against corrosion with non-toxic paint finish  
 Paint-finished iron condenser coil, with high thermal efficiency  
 Anti-condensation heating element on the body below the magnetic seal stop  
 Ergonomic handle throughout full width of door/drawer and magnetic seals on all four sides  
 Stainless steel feet Ø 2" with adjustable H 150÷200 mm  
 Self-closing doors locking in open position at 100°

### INTERNAL SET-UP

Snap-in type AISI 304 18/10 stainless steel slides and uprights, completely removable without the need of tools to facilitate cleaning  
 8 pair of slides for each door module

### COOLING UNIT

Evaporator with high-power fan to ensure maximum cooling system efficiency  
 Compressor and condenser mounted on a removable base to simplify and facilitate maintenance or replacements  
 R134a refrigerant for NT versions, R404A refrigerant for LT versions  
 Automatic defrosting via electric heating element  
 Automatic evaporation of condensate via compressor coil on models TR or electric heating element on models TPR

### COMMANDS, CONTROLS AND SAFETY DEVICES

#### MOD. SILVER

Electronic telethermostat with temperature probes  
 Compressor protected by overload cut-out with automatic reset

#### MOD. GOLD

Patented control able to keep the right humidity level inside the refrigerated compartment, preserving the most delicate food specialities in an ideal ambient  
 Microprocessor control with 3 core probes (for the refr. compartment, for defrosting-end and for dirty compressor)  
 Intelligent defrosting with the insertion of an electrical heater, only in case of freezing evaporator  
 Compressor protected by overload cut-out with automatic reset

#### HACCP (only for GOLD version)





The new control respects the strictest HACCP rules, memorizing and displaying alarms of various types (over-temperature, black out) in the cabinet as well as remote  
 The alarms and the data can be downloaded in a PC through a data gathering and transferring infrared-system and they can be later on printed  
 The self-diagnosis and the monitoring complete all the other function of the cabinet, avoiding loss of efficiency in the cooling unit complete all the other function of the cabinet, avoiding loss of efficiency in the cooling unit

#### VERSIONS / ACCESSORIES (OPTIONALS)

Version with worktop and upstand  
 Version with remote cooling unit  
 Version with water cooled unit  
 Kit of castors  
 Door lock and key

## TAVOLI EN - SILVER e GOLD EN REFRIGERATED COUNTERS - SILVER e GOLD

Modello / model			2M	2M
Controllo / control			EN-TN	EN-BT
Profondità nominale Nominal Depth	LxPxH [WxDxH]	mm	800	800
Capacità tavolo refrigerato Chill counter capacity	l		444	444
Dimensioni senza piano Dimensions without top	LxPxH [WxDxH]	mm	1408x790x850	
Dimensioni con piano Dimensions with top	LxPxH [WxDxH]	mm	1420x800x900	
Dimensioni con alzata Dimensions with upstand	LxPxH [WxDxH]	mm	1420x800x1000	
Profondità con porta 90° Depth with 90° door	mm		1280	1280
Porte intere Whole doors	n°		2	2
Classe climatica Climatic class			T	T
Temperatura di esercizio Operating temperature	°C		-2/+8	-20/-15
Refrigerante Refrigerant	gas		R134a	R404A
Capacità refrigerazione Refrigeration capacity	W		304 (*) 700 (**)	334 (*) 447 (°°)
Alimentazione elettrica Electric power supply	V/~ / Hz		230/1/50	
Assorbimento elettrico Max. absorbed current	W A		360 2,4	586 3,4
Dotazione interna per vano porta Internal fitting for each door space	n°		8 coppie guida EN 8 pair of slides EN	
Passo tra le coppie guida Interstep	mm		55	55
Capacità contenitori 600x400x70 Containers capacity 600x400x70	n°		16	16
Dimens. massima imballo Max packing dimensions [WxDxH]	LxPxH [WxDxH]	mm	1448x820x1090	
Volume imballo Packing volume	m³		1,29	1,29
Peso Weigh	netto/ net lordo/gros	kg	156 171	156 171

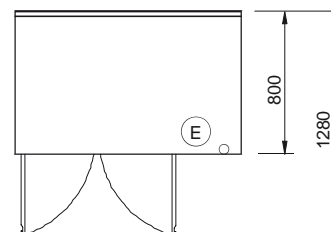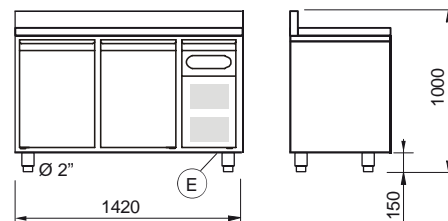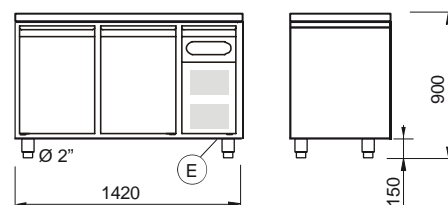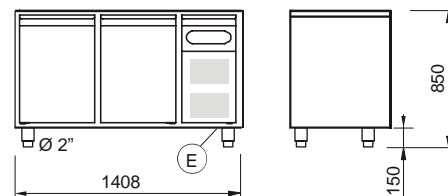





(E) Connessione elettrica  
Electric connection

(\*) Temp. evap. -10°C, Temp. cond. +45°C / Evap. temp. -10°C, Cond. temp. +45°C  
(\*\*) Temp. evap. +7.2°C, Temp. cond. +54.4°C / Evap. Temp. +7.2°C, Cond. Temp. +54.4°C

(°) Temp. evap. -25°C, Temp. cond. +45°C / Evap. temp. -25°C, Cond. temp. +45°C  
(°°) Temp. evap. -23,3°C, Temp. cond. +54.4°C / Evap. temp. -23,3°C, Cond. temp. +54.4°C

## TAVOLI EN - SILVER e GOLD EN REFRIGERATED COUNTERS - SILVER e GOLD

Modello / model			3M EN-TN	3M EN-BT
Controllo / control				
Profondità nominale Nominal Depth	LxPxH [WxDxH]	mm	800	800
Capacità tavolo refrigerato Chill counter capacity		l	666	666
Dimensioni senza piano Dimensions without top	LxPxH [WxDxH]	mm	1947x790x850	
Dimensioni con piano Dimensions with top	LxPxH [WxDxH]	mm	1960x800x900	
Dimensioni con alzatina Dimensions with upstand	LxPxH [WxDxH]	mm	1960x800x1000	
Profondità con porta 90° Depth with 90° door		mm	1280	1280
Porte intere Whole doors		n°	3	3
Classe climatica Climatic class			T	T
Temperatura di esercizio Operating temperature		°C	-2/+8	-20/-15
Refrigerante Refrigerant		gas	R134a	R404A
Capacità refrigerazione Refrigeration capacity		W	353 (*) 810 (**)	441 (*) 638 (**)
Alimentazione elettrica Electric power supply		V/~/Hz	230/1/50	
Assorbimento elettrico Max. absorbed current		W A	465 2,9	667 3,9
Dotazione interna per vano porta Internal fitting for each door space		n°	8 coppie guida EN 8 pair of slides EN	
Passo tra le coppie guida Interstep		mm	55	55
Capacità contenitori 600x400x70 Containers capacity 600x400x70		n°	24	24
Dimens. massima imballo Max packing dimensions [WxDxH]	LxPxH	mm	2000x820x1090	
Volume imballo Packing volume		m³	1,71	1,71
Peso Weigh	netto/ net lordo/gros	kg	195 210	195 210

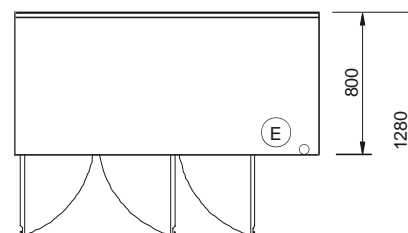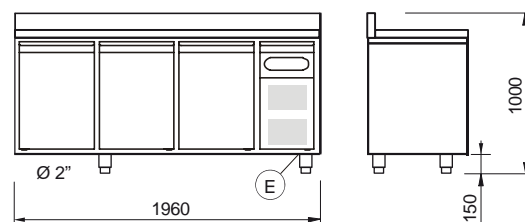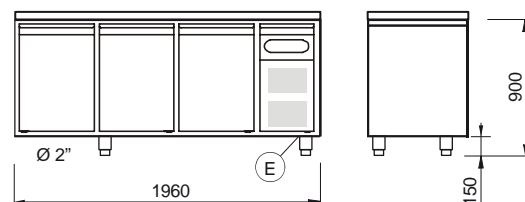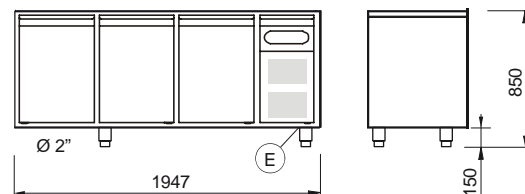





**E** Connessione elettrica  
Electric connection

(\*) Temp.evap. -10°C, Temp. cond. +45°C / Evap. temp. -10°C, Cond. temp. +45°C  
(\*\*) Temp.evap. +7.2°C, Temp.cond. +54.4°C / Evap.temp. +7.2°C, Cond.temp. +54.4°C

(°) Temp.evap. -25°C, Temp. cond. +45°C / Evap. temp. -25°C, Cond. temp. +45°C  
(°°) Temp.evap. -23,3°C, Temp.cond. +54.4°C / Evap.temp. -23,3°C, Cond.temp. +54.4°C

**TAVOLI EN - SILVER e GOLD**  
**EN REFRIGERATED COUNTERS - SILVER e GOLD**

Modello / model			4M	4M
Controllo / control			EN-TN	EN-BT
Profondità nominale Nominal Depth	LxPxH [WxDxH]	mm	800	800
Capacità tavolo refrigerato Chill counter capacity	l		888	888
Dimensioni senza piano Dimensions without top	LxPxH [WxDxH]	mm	2486x790x850	
Dimensioni con piano Dimensions with top	LxPxH [WxDxH]	mm	2500x800x900	
Dimensioni con alzatina Dimensions with upstand	LxPxH [WxDxH]	mm	2500x800x1000	
Profondità con porta 90° Depth with 90° door	mm		1280	1280
Porte intere Whole doors	n°		4	4
Classe climatica Climatic class			T	T
Temperatura di esercizio Operating temperature	°C		-2/+8	-20/-15
Refrigerante Refrigerant	gas		R134a	R404A
Capacità refrigerazione Refrigeration capacity	W		441 (*) 1010 (**)	486 (°) 727 (°°)
Alimentazione elettrica Electric power supply	V/~ /Hz		230/1/50	
Assorbimento elettrico Max. absorbed current	W A		520 3,2	809 4,3
Dotazione interna per vano porta Internal fitting for each door space	n°		8 coppie guida EN 8 pair of slides EN	
Passo tra le coppie guida Interstep	mm		55	55
Capacità contenitori 600x400x70 Containers capacity 600x400x70	n°		32	32
Dimens. massima imballo Max packing dimensions [WxDxH]	LxPxH [WxDxH]	mm	2540x820x1090	
Volume imballo Packing volume	m³		2,13	2,13
Peso Weigh	netto/ net lordo/gros	kg	230 245	230 245

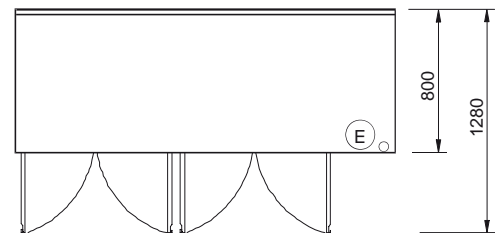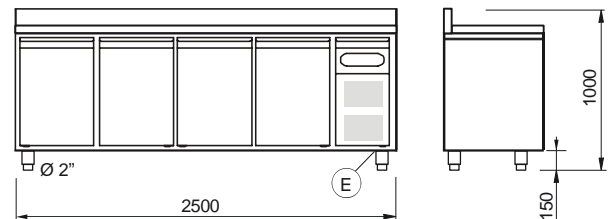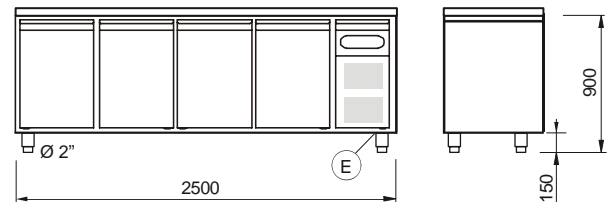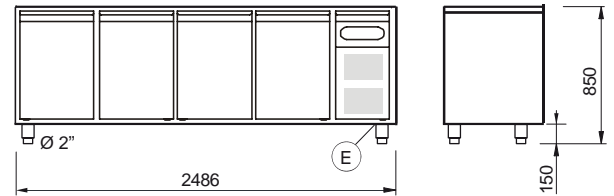

(E) Connessione elettrica  
Electric connection

(\*) Temp.ev. -10°C, Temp.cond. +45°C / Ev.temp. -10°C, Cond.temp. +45°C  
(\*\*) Temp.ev. +7.2°C, Temp.cond.+54.4°C / Ev.temp. +7.2°C, Cond.temp. +54.4°C

(°) Temp.evap. -25°C, Temp. cond. +45°C / Evap. temp. -25°C, Cond. temp. +45°C  
(°°) Temp.evap. -23,3°C, Temp.cond. +54.4°C / Evap.temp. -23,3°C, Cond.temp. +54.4°C



**Aishwarya Consolidates Pvt. Ltd.,**  
#19, Frist Floor, 10<sup>th</sup> 'B' Main, 27<sup>th</sup> Cross,  
Third Block Jayanagar, BANGALORE – 560 011, INDIA  
Tel: +91-80-2664 1200/1/2 Fax: +91-80-2664 1204  
E-mail : [aishtek@vsnl.com](mailto:aishtek@vsnl.com) [www.aishwaryaconsolidates.com](http://www.aishwaryaconsolidates.com)